

PART NUMBER

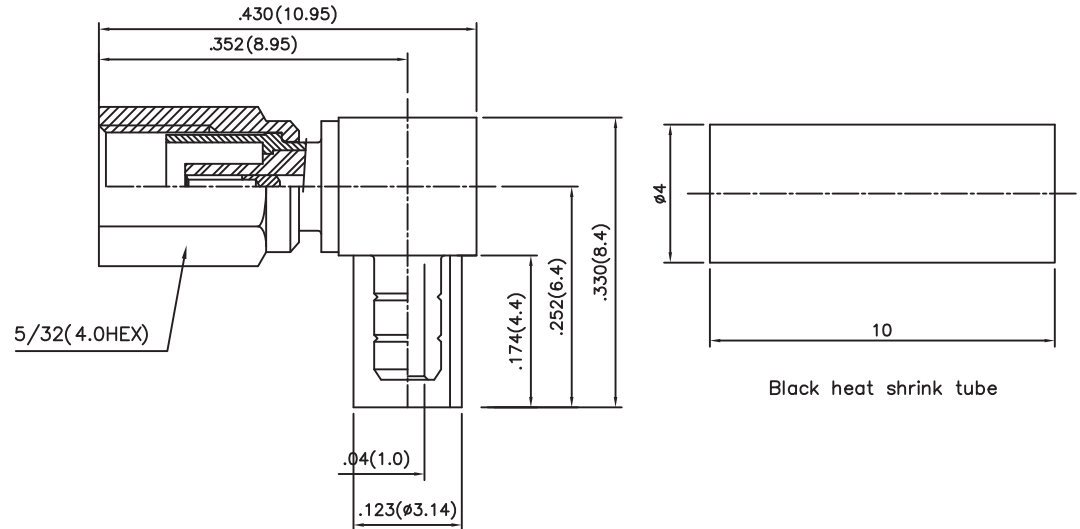
KCC177796

REV.

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 12.4 GHz
VSWR	1.20 + 0.03xF (GHz)
Insertion Loss	0.3 dB @ 1.5 GHz
Working Voltage	250 V rms Max.
DWW	750 V Min.
Insulation Resistance	1000 MΩ Min.
Temperature Range	55°C ~+ 145°C

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm [inches]

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC177796

DESCRIPTION

SSMC Right Angle Female Plug, Crimp

CAGE CODE

664U0

SIGNATURE

X

Cable Types: RG-178, 196**Component**

Body & Coupling
Center Contact
Ferrule
Insulator

Material

Brass
Be.Cu
Brass
PTFE

Plating

Gold
Gold
Gold

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.