

PART NUMBER

**KAD179335**

REV.

DATE

COMMENTS

INITIAL

A

02-28-17

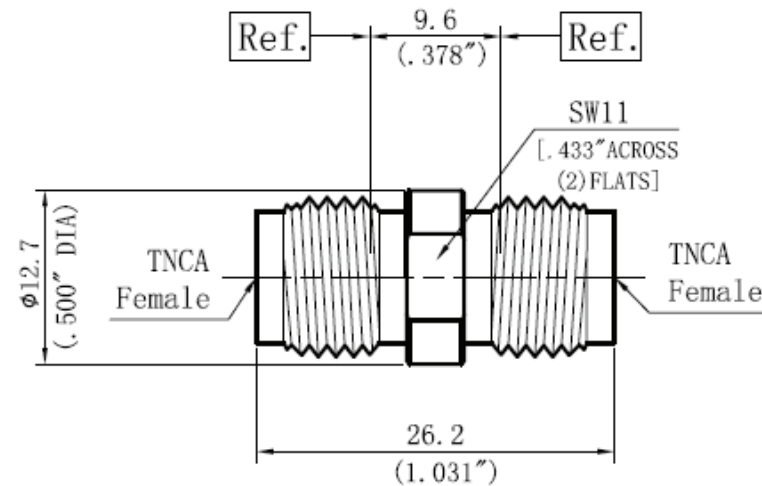
Updated Drawing Dimensions

*MP***Electrical Data**

Impedance	50 $\Omega$
Frequency Range	DC - 18 GHz.
Insertion Loss	0.06 f 1/2 dB
Pulse Power	CW @ 100 W
VSWR	1.15 max

**Mechanical Data**

Durability	2,000 Cycles
Temperature Range:	-60 °C - 165 °C

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KAD179335**

DESCRIPTION

**Adapter, In Series, TNC Female Jack to Female Jack**

CAGE CODE

**664U0**

SIGNATURE

**X**

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.

**Component**

Body  
Socket Contact  
Insulator

**Material**

Stainless Steel  
BeCu  
PTFE

**Plating/Finish**

Passivated  
Gold