

PART NUMBER

KAD179653

REV.

DATE

COMMENTS

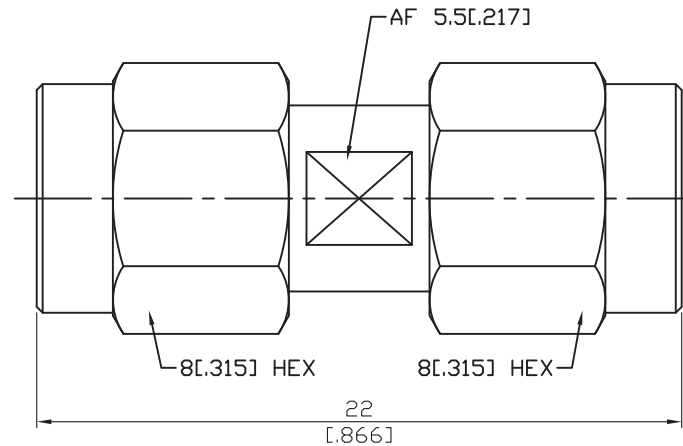
INITIAL

Electrical Data

Impedance 50Ω
 Frequency Range DC - 18GHz.
 VSWR 1.2

Mechanical Data

Durability ≥100 Cycles Min.
 Temperature Range: -65 °C - 165 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAD179653

DESCRIPTION

Adapter, In-Series, SMA Male Plug to Male Plug

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body & Coupling Nut

Material

Brass

Plating(Micro-Inch)Gold 4 Over Nickel-Phosphorus
Alloy 80 Over Copper 20

Center Contact

Brass

Gold 4 Over Nickel-Phosphorus
Alloy 80 Over Copper 20

Gasket

Silicone

Retainer Ring

BeCu

Tin-Zinc-Copper-Alloy 100
Over Copper 50

Insulator

PTFE

Gasket

Silicone