

PART NUMBER

KAD187406

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance	50 Ω
Frequency Range	DC - 67 GHz.
Insertion Loss	0.05 XSQRT[F(GHz)]dB max
Voltage Rating	500 VRMS
Insulation Resistance	5000 M Ω
Dielectric Withstanding Voltage	1000 VRMS
VSWR	1.25 max

Mechanical Data

Durability	1000 Cycles Min.
Temperature Range:	-40 °C - 85 °C

RoHS Compliant

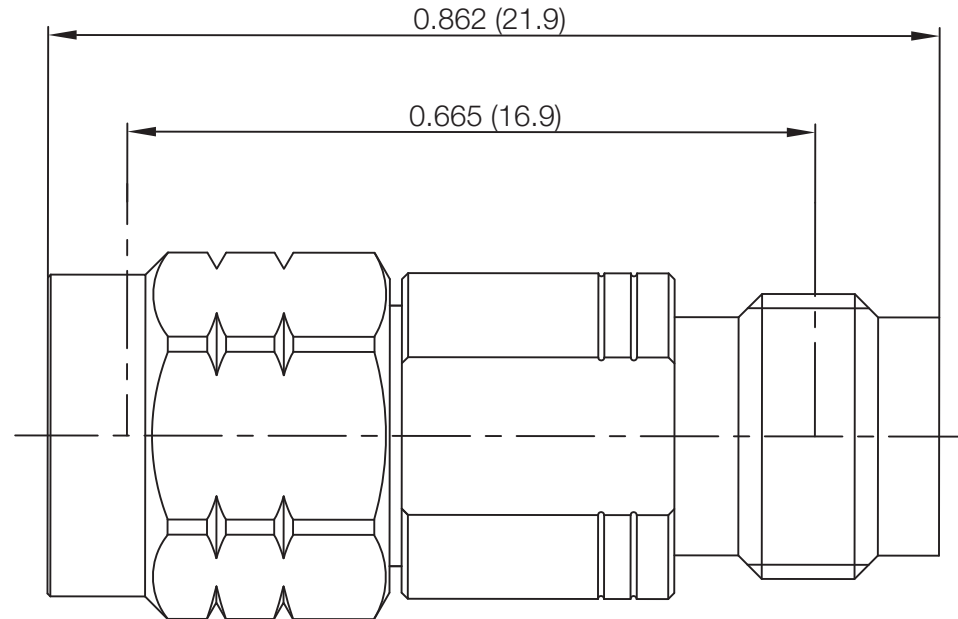

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAD187406

DESCRIPTION

Adapter, 1.85mm Male to 1.85mm Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

Body
Center Contact
Outer Contact
Insulator

Material

Stainless Steel
BeCu
Stainless Steel
PEI

Plating/Finish

Passivated
Gold
Passivated