

PART NUMBER

KAT177479-XX

REV.

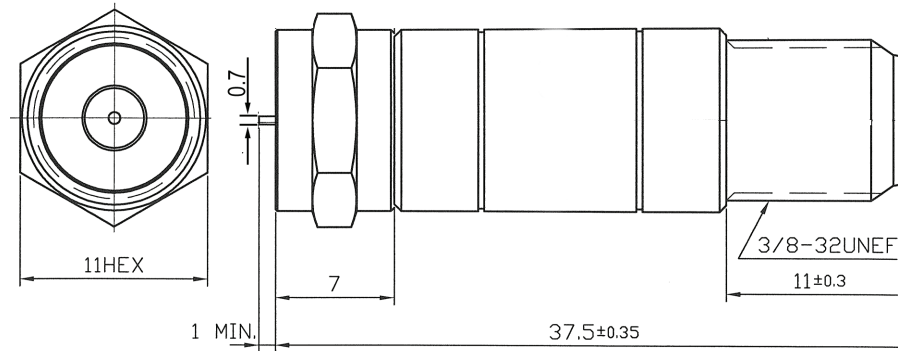
DATE

COMMENTS

INITIAL

Electrical Data

Impedance	75 Ω
Frequency Range	DC - 3 GHz.
Max Voltage	35VDC
Max Current	750mA

RoHS Compliant

KAT177479-XX	dB Value	Insertion Loss		Return Loss	
		0.04-1.0 GHz	1.0-2.05 GHz	0.04-1.0 GHz	1.0-2.05 GHz
KAT177479-01	1	1+/-0.6	1+/-1	20 min	18 min
KAT177479-03	3	3+/-0.6	3+/-1	20 min	18 min
KAT177479-06	6	6+/-0.6	6+/-1	20 min	18 min
KAT177479-08	8	8+/-0.8	8+/-1.2	20 min	18 min
KAT177479-10	10	10+/-0.6	10.6+/-1	20 min	18 min

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177479-XX

DESCRIPTION

Fixed Attenuator, F Male/Female, DC Power Passing (HRL)

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.