

PART NUMBER

KCC177047

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 18 GHz.
Insertion Loss	≤ 0.25 dB max @ DC - 6 GHz
Test Voltage	1,000 VRMS
Working Voltage	480 VRMS
Insulation Resistance	$\geq 5,000$ M Ω
VSWR	≤ 1.3 max @ DC - 6 GHz

RoHS Compliant**Mechanical Data**

Durability	500 Cycles Min.
Temperature Range:	-55 °C - 155 °C

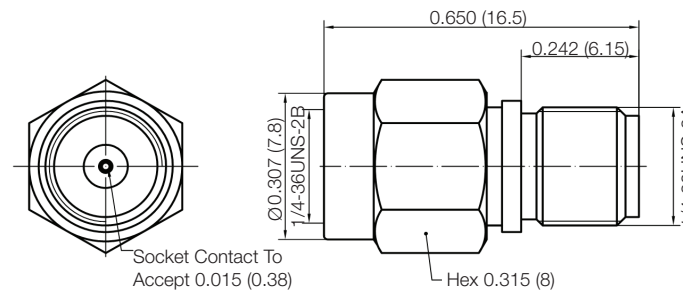

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC177047

DESCRIPTION

SMA Straight Male Plug Field Replaceable Receptcle, Thread-In

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

Body & Nut
Center Contact
Insulator

Material

Stainless Steel
BeCu
PTFE

Plating/Finish

Passivated
Gold