

PART NUMBER

**KCC177871**

REV.

DATE

COMMENTS


INITIAL

**RoHS Compliant****Electrical Data**

Impedance	50 $\Omega$
Frequency Range	DC - 6 GHz.
Return Loss	20 dB Min @ DC-1 GHz 16 dB Min @ 1-3 GHz 11 dB Min @ 3-6 GHz
Insertion Loss	0.25 max
Insulation Resistance	1,000 M $\Omega$
Dielectric Withstanding Voltage	500 VRMS

**Mechanical Data**

Durability	500 Cycles Min.
------------	-----------------

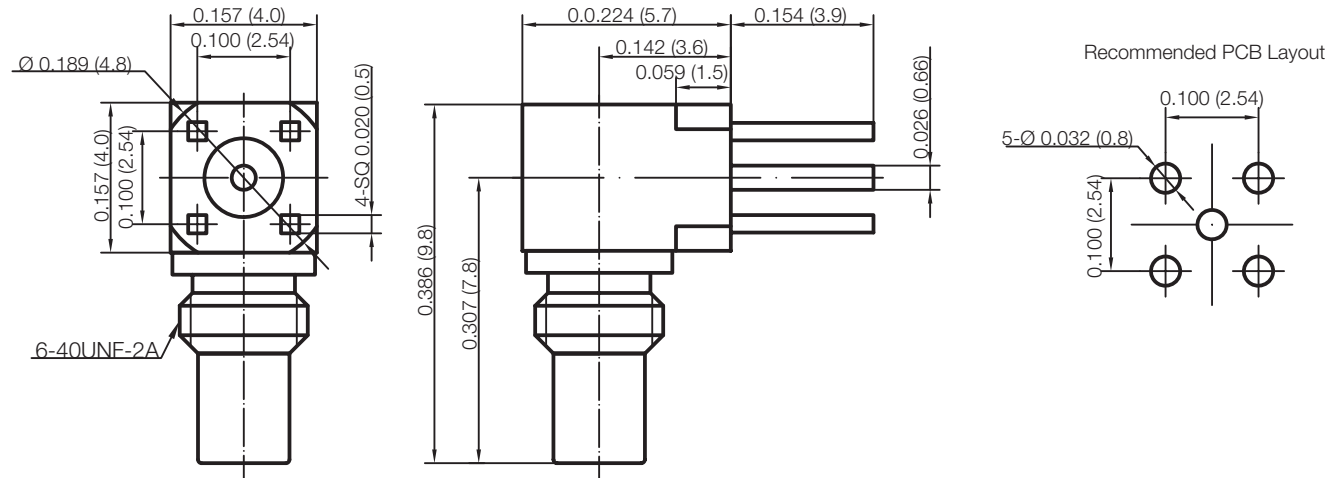

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KCC177871**

DESCRIPTION

**SSMC Right Angle Male Jack 4 Leg PC Board Receptacle**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

**Component**

Body  
Center Contact  
Insulator

**Material**

Brass  
Brass  
PTFE

**Plating**

Gold  
Gold