

PART NUMBER

KCC178184

REV.

DATE

COMMENTS


INITIAL

RoHS Compliant**Electrical Data**

Impedance	50 Ω
Frequency Range	DC - 8 GHz.
Insertion Loss	0.25 dB Max
Test Voltage	500 VRMS
Working Voltage	350 VRMS
Insulation Resistance	5,000 M Ω min
VSWR	1.25

Mechanical Data

Durability	500 Cycles Min.
Temperature Range:	-55 $^{\circ}$ C - 155 $^{\circ}$ C

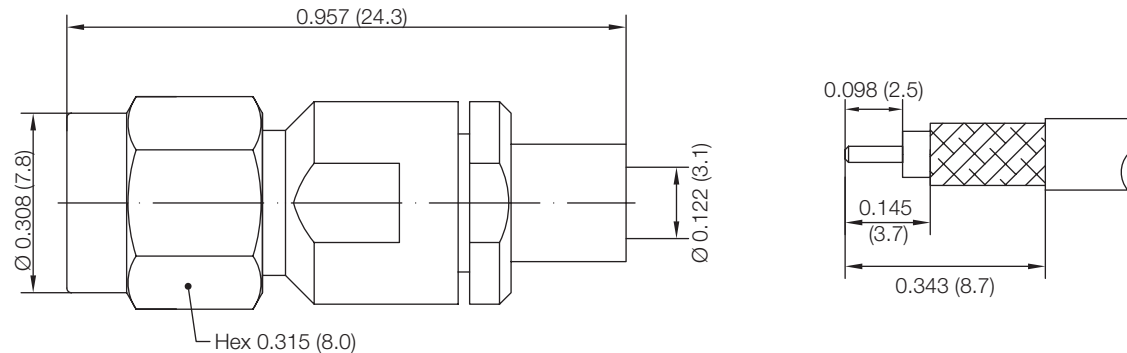

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC178184

DESCRIPTION

SMA Straight Male Plug, Solder/Clamp

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Cable Type: LL120**Component**

Body & Coupling Nut

Center Contact

O-Ring

Insulator

Material

Stainless Steel

BeCu

Silicone Rubber

PTFE

Plating/Finish

Passivated

Gold