PART NUMBER


KAD177232

REV.		INITIAL

RoHS Compliant

Electrical Data

Impedance Frequency Range	50 Ω DC - 18 GHz
Contact Resistance	
Center Conductor	≤3.0MΩ
Outer Conductor	≤5.0 M Ω
Insulation Resistance	≥5000 M Ω
Insulator Withstanding	1000V
VSWR	≤1.25
Durability	500 Cycles

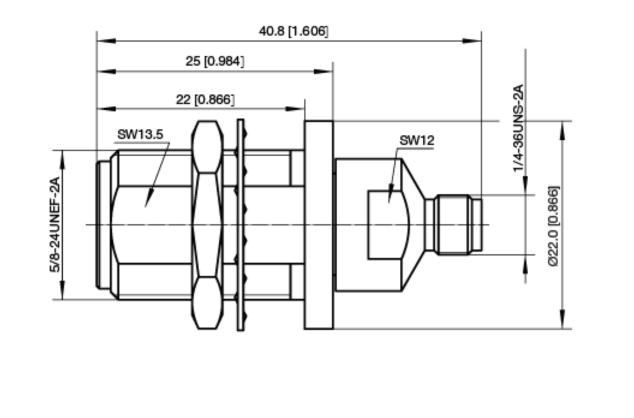

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

G Konnect RF

WWW.KONNECTRF.COM 540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887

PART NUMBER	AD177232	DESCRIPTION Precision Adapter - Between Series N Female Jack Bulkhead to SMA Female Jack		
CAGE CODE 664U0	SIGNATURE X	Materials	Stainlass Staal	Passivated
THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.		Body Center Contact Male Center Contact Female Spring Washer Insulator	Brass Phos.Bronze	Gold Plated Gold Plated Nickel Plated