

PART NUMBER

KFL177454

REV.

DATE

COMMENTS


INITIAL

Electrical Data

| | |
|----------------|---|
| Impedance | 50 Ω |
| Pass band | 4400-5000MHz |
| Rejection | $\geq 70\text{dB}@500\text{MHz}-4250\text{MHz}$ $\geq 70\text{dB}@5150\text{MHz}-7000\text{MHz}$ |
| Insertion Loss | $\leq 2.0\text{dB}$ |
| Return Loss | $\geq 12\text{dB}$ |
| Average Power | $\leq 10\text{W}$ |

RoHS Compliant**Mechanical Data**

| | |
|-------------------------|------------------|
| Operational Temperature | Room Temperature |
| Storage Temperature | -55 to +85 °C |

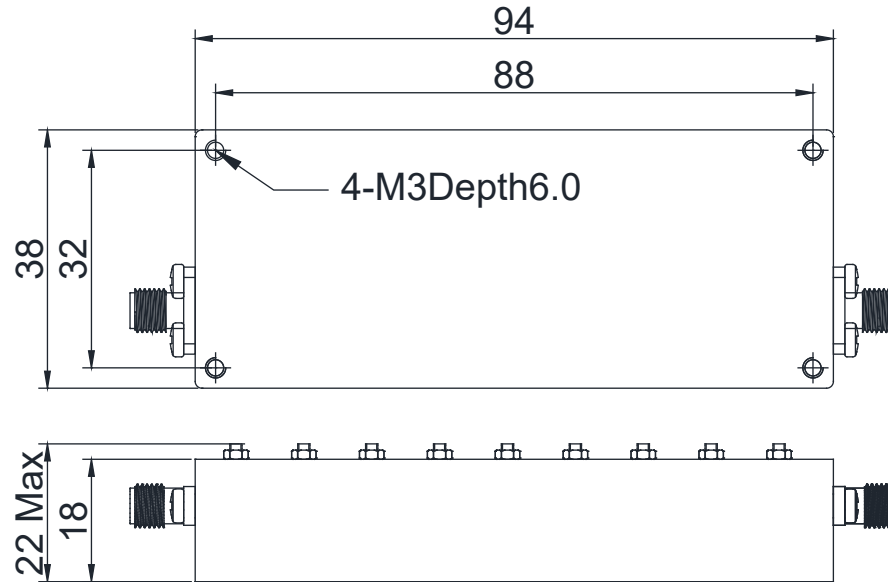

Drawing not to scale. Dimensions for reference only

Units: mm ($\pm 0.3\text{mm}$)**Konnect RF**

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KFL177454

DESCRIPTION

Bandpass Filter, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Plating
Black Painting

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.