

PART NUMBER

KLP177102

REV.

DATE

COMMENTS



INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 2.5 GHz.
DC Break-down Voltage	230V +/- 20%
Protected Side Connector	TNC Female 50 ohm
Surge Side Connector	TNC Female 50 ohm
VSWR	1.20 Max (1.1 Max @ 1,600MHz)

RoHS Compliant**Mechanical Data**

Temperature Range:	-30 °C - 85 °C
--------------------	----------------

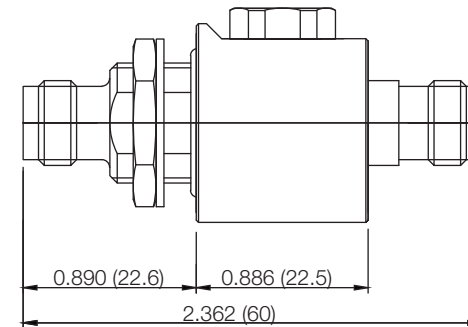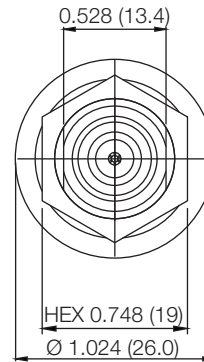

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KLP177102

DESCRIPTION

**Lightning Protector, TNC Female
Jack to TNC Female Jack, Bulkhead**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

Body , Nut & washer
Housing
Center Contact
Insulator
O-Ring

Material

Brass
Brass
BeCu
PTFE
Silicone Rubber

Plating

Nickel
Nickel
Gold